

**AU-II/ECO** AL100  
OUTLET Ø180R

100 mm 4"	5 mt 16,4 ft	200° C 392° F	BC-AU-II/100	1 HP 0,75 Kw	650 m <sup>3</sup> /h 382 c.f.m.
--------------	-----------------	------------------	--------------	-----------------	-------------------------------------

**AU-II/PRO** AL100  
OUTLET Ø180R

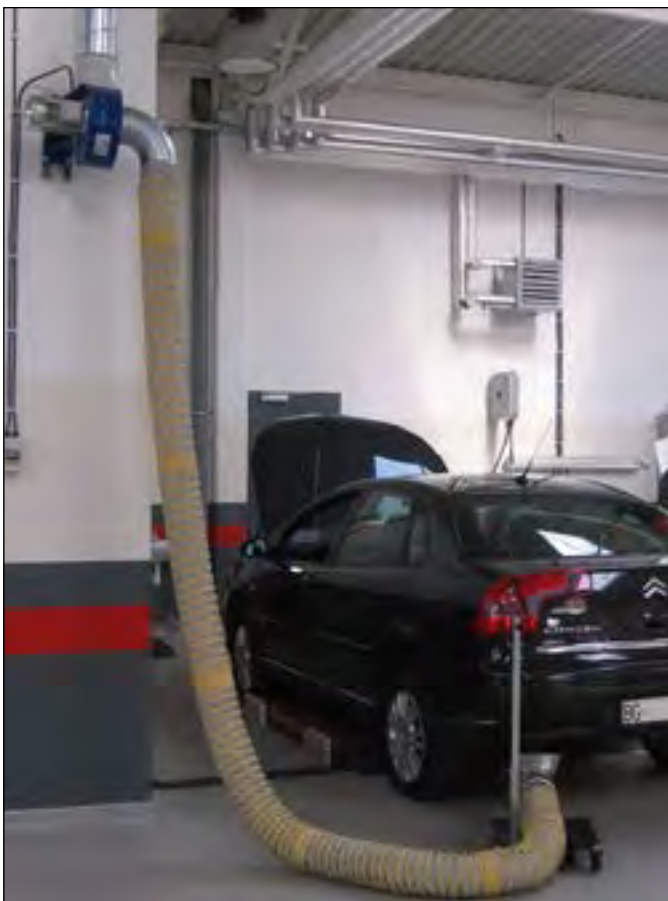

150 mm 6"	5 mt 16,4 ft	200° C 392° F	BC-AU-II	1,5 HP 1,1 Kw	1400 m <sup>3</sup> /h 823 c.f.m.
--------------	-----------------	------------------	----------	------------------	--------------------------------------






**AU-II/FAP** AL100  
OUTLET Ø180R

150 mm 6"	5 mt 16,4 ft	400° C 752° F	BC-AU-II	1,5 HP 1,1 Kw	1400 m <sup>3</sup> /h 823 c.f.m.
--------------	-----------------	------------------	----------	------------------	--------------------------------------

**AU-II/DYNO** AL100  
OUTLET Ø200R

200 mm 8"	5 mt 16,4 ft	1000° C 1832° F	BOT-600 CAR	3 HP 2,2 Kw	2500 m <sup>3</sup> /h 1470 c.f.m.
--------------	-----------------	--------------------	----------------	----------------	---------------------------------------



-  Impianto completo di aspirazione gas di scarico con canalina ETK e carrelli scorrevoli portatubo. Completo di elettroaspiratore e predisposizione per staffaggio scorrevole.
-  Complete exhaust extraction system with aluminium track ETK and sliding carriages. Fan and predisposition for sliding fixing point are included.
-  Complete exhaust extraction system with aluminium track ETK and sliding carriages. Fan and predisposition for sliding fixing point are included.
-  Kanalanlage komplett mit Ventilator, Laufwagen und Zubehör.
-  Sistema completo de extracción de gases de escape formado por un carril de aluminio y carros deslizantes, equipado con un electroventilador, y están incluidos los soportes deslizantes.

